



GAUNTLET / BUILT-IN BRACE / EXPOSED BUILT-IN BRACE
ORDER / SPECIFICATION FORM

42 Breckenridge Street ~ Buffalo, New York 14213 ~ (800) 843-6653 ~ Fax (716) 881-0406

Email: info@niagarabraces.com Web: www.niagarabraces.com

DATE _____

SHIP TO: P.O. # _____

Name _____

Address _____

City _____ State _____ Zip _____

Contact Person Regarding Order _____

Email _____

Phone # _____

Fax # _____

BILL TO:

Name _____

Address _____

City _____ State _____ Zip _____

PT NAME: _____

Sex _____ Weight _____ Age _____

DIAGNOSIS:

PTTD DJD Trauma

Other (Specify) _____

Ankle Range of Motion:

Dorsiflexion - Fixed/Fused Mobile/Normal

Plantarflexion - Fixed/Fused Mobile/Normal

Hindfoot - Flexible - Correct to Neutral
 Rigid - Do Not Correct / Requires Extrinsic Posting

Forefoot - Flexible - Correct to Neutral
 Rigid - Do Not Correct / Requires Extrinsic Posting

Type of Brace

Solid Cutout Heel Leaf

Solid w/toe filler (shoe **Must** be provided)

Brace Built into Tru-Mold Shoe or Boot**

Exposed Brace Built into Tru-Mold Shoe or Boot**
 ** fill out Tru-Mold Order Form (Extra cost for shoe)

Color

Black Taupe Light Tan

White Brown (dark)

Lining

(Standard 1/8" Poron between lining and plastic)

Leather Plastazote

Closure

Lace

Velcro Strap - w/D-Ring

Lace - 1 Velcro top strap - w/D-Ring

Lace - 2 Velcro top straps - w/D-Rings

Z Strap (Reverse Velcro)

Speed Lace (top 3 eyelets)


Additional Comments _____

Height

* From Plantar Surface of Heel to Topline of Brace. Does not include additional 1-1/2" Padded Collar above brace topline

5" (127mm) 7" (178mm) 9" (229mm)

Custom (Specify) _____

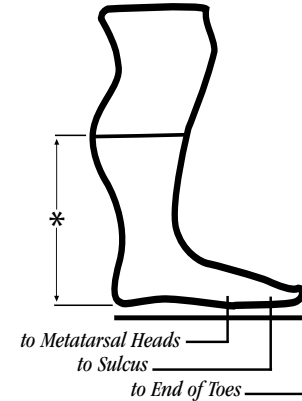

Length of Foot Plate

To Metatarsal Heads To Sulcus

To End of Toes

Cast should be taken in a comfortable functional position, semi-weight bearing

RF Only LF Only Bilateral

Rev - June 2017